



FLIGHT / SPACEFLIGHT HERITAGE HIGH-ACCURACY PRESSURE TRANSDUCER



Model 7201
Flight/Spaceflight Heritage High-Accuracy
Pressure Transducer

MODEL 7201

FEATURES:

- Space flight qualified per MSFC-HDBK-527
- Class "S" qualified electronics
- Radiation hardened to 40 KRAD
- Measurement accuracy to $< \pm 0.3\%$ FSO (RSS)
- 0-5 Vdc output
- Designed to meet 7-year LEO requirements
- Compact, lightweight design weighs just 5 oz (0.1 kg)
- Packaging qualified to FED-STD-101 Method 5005/5007

APPLICATIONS:

- Commercial and defense satellites
- Unmanned aerial vehicles
- Onboard aircraft systems
- Avionics
- Spacecraft and launch vehicles
- Ground and engine testing

PRODUCT OVERVIEW:

The Model 7201 from GP:50 is a high-accuracy, low-noise, flight-heritage pressure transducer, designed to provide high-reliability within demanding aerospace environments. The exceptional durability and performance of this transducer has been field proven over more than 25 years and across hundreds of applications.

FIELD OPTIONS:

- "B+ and S Class" electronics
- AS5202-04, AS4395E04 process connections
- D38999/27YB98PN, D38999/27YA35PN electrical connectors
- 0 to 5 Vdc 3-wire hookup, or non-isolated 4-wire hookup


GP:50 MODEL 7201

DIMENSIONAL DRAWING

All dimensions are in inches (mm)

STANDARD WIRING

PIN	MODEL 7201
ORG	+15 VDC EXC
GRN	+OUTPUT
WHT	-OUTPUT
BLU	-EXC

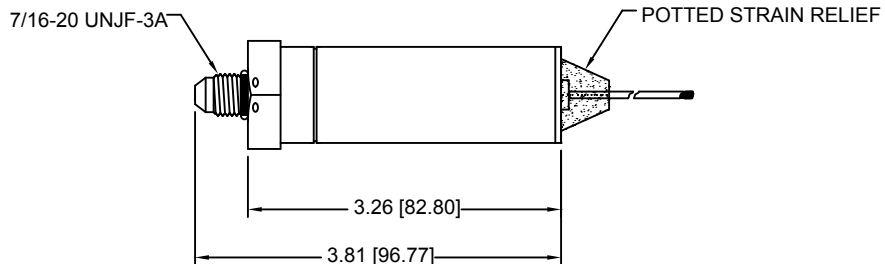

REFERENCE SPECIFICATIONS

ELECTRICAL	MECHANICAL
• Output Signal: 0 to 5 Vdc • Supply Voltage: 15 Vdc + 50 mV regulated • Input Current: 25 mA nominal • Output Current: 2 mA max for <0.1% FSO attenuation • Circuit Protection: Designed to meet *MIL-STD-461/EMI/RFI (some options may affect rating) reverse polarity protection • Response Time: <4 ms • Connection: Tefzel cable with 4-conductor 32 AWG wire	• Process connection: AS4395E04 standard, AS5202-04, 1/4" NPT (M) optional • Proof Pressure: 1.5X FSO • Burst Pressure: 2.5X FSO • Secondary containment: Rated at 4,500 PSI (310 BAR) for ranges ≥ 50 PSI; 2,400 PSI (166 BAR) for ranges <50 PSI • Random Vibration: >70 G RMS (20 Hz to 2,000 Hz) • Sinusoidal Vibration: 7.0 G's from 5 Hz to 100 Hz • Pyroshock: >4,000 G's / 12 g • Constant Acceleration: 5 G's for 30 minutes • Approximate Weight: 5 oz (0.1 kg)
ACCURACY (HYSTERESIS, NON-LINEARITY & REPEATABILITY @ +70 °F)	PRESSURE RANGES
• Static Accuracy (RSS): $<\pm 0.3\%$ FSO • Zero/span balance: $\pm 0.5\%$ FSO • Non-repeatability: $<\pm 0.1\%$ FSO • Hysteresis: $<\pm 0.2\%$ FSO • Non-linearity: $<\pm 0.2\%$ FSO • Thermal Error: $\pm 0.4\%$ FSO over center • Total Error Band: $\pm 1.0\%$ FSO (includes all 5 parameters)	• 0 to 50 thru 0 to 15K PSIA (3.4 thru 1,034 BAR)
MATERIALS OF CONSTRUCTION	THERMAL SPECIFICATION
• Wetted Parts: Inconel 718 sensor, Inconel 625 port • Housing: 316L stainless steel	• Compensated: -4 °F to +104 °F (-20 °C to +40 °C) • Operating: -75 °F to +250 °F (-60 °C to +120 °C) • NIST Traceability/Calibration: ANSI-Z540-1 • Workmanship: J-001/NASA 8739.3 standard • Quality System: ISO 9001:2008

*Options may affect Mil-specifications.
Please consult factory for your specific needs.

**Standard configurations shown.
Please consult factory for other options.**

All specifications are for reference purposes only. In the interests of continuous product improvement, all specifications are subject to change without notice. Please contact GP:50 for assistance with your application.

© 2014 GP:50 NY Ltd. | 2770 Long Rd, Grand Island, NY 14072 USA

Tel: +1.716.773.9300 **Fax:** +1.716.773.5019 **Email:** sales@gp50.com **Web:** www.gp50.com

